




Quick-Coupler Cascades

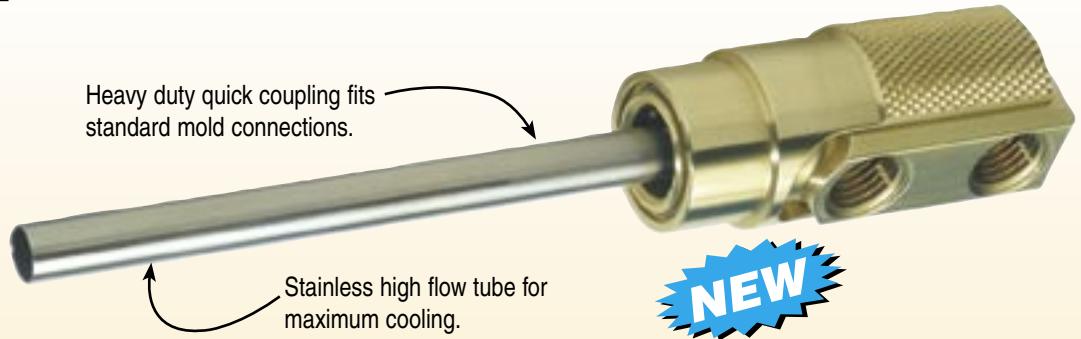


Heavy duty quick coupling fits standard mold connections.

Stainless high flow tube for maximum cooling.

ASSEMBLIES

CATALOG NUMBER	P PIPE TAP SIZE (NPT)	T HIGH FLOW TUBE THREAD	HIGH FLOW TUBE INCLUDED	H HEX KEY SIZE	L	C	A	D ACTUAL O.D.
SC186N	1/8	1/4-28	HF187T-12	13/16	1.937	11/16	31/32	7/8
SC181N	1/8	1/4-28	HT187T-12	13/16	2.250	1"	31/32	7/8
SC146N-4	1/4	5/16-24	HT250T-12	1"	2.187	11/16	1-5/32	1-1/8
SC141N-4	1/4	5/16-24	HT250T-12	1"	2.500	1"	1-5/32	1-1/8
SC121N-4	1/4	1/2-20	HT437T-12	1-1/4	3.125	1-1/4	1-1/4	1-3/8
SC121N-6	3/8	1/2-20	HT437T-12	1-1/4	3.125	1-1/4	1-1/4	1-3/8

- Can be installed and removed without disconnecting coolant lines.
- Viton Seals standard.
- High flow design provides maximum cooling rates.
- 12" high flow stainless tube included.

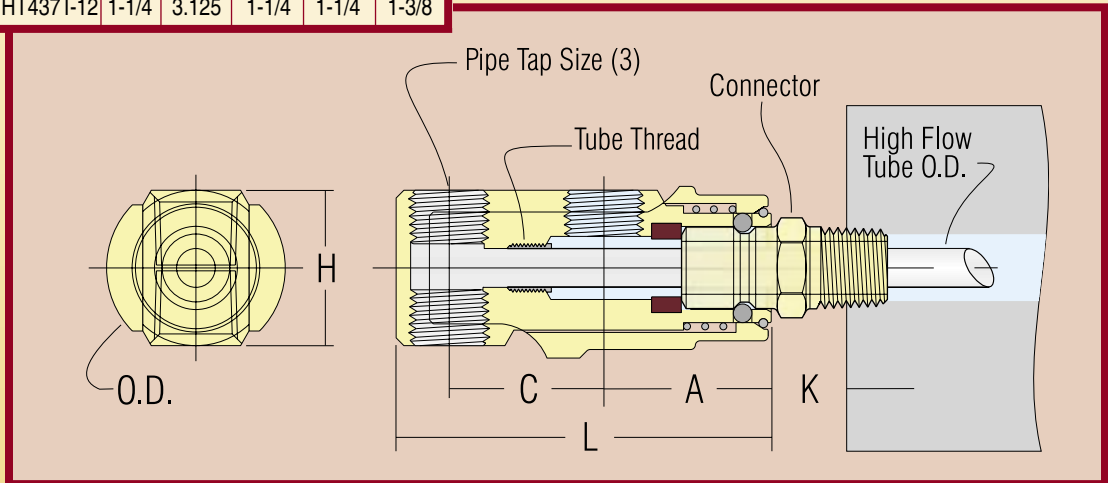

HEADS

CATALOG NUMBER	HIGH FLOW TUBE THREAD SIZE	USE HIGH FLOW TUBE NUMBER
SC186H	1/4-28	HF187T-
SC181H	1/4-28	HF187T-
SC146H-4	5/16-24	HF250T-
SC141H-4	5/16-24	HF250T-
SC121H-4	1/2-20	HF437T-
SC121H-6	1/2-20	HF437T-



- Aids in quick and efficient assembly and disassembly of cooling circuit.
- Heavy duty all brass and stainless steel construction.
- Dimensions are same as above assembly chart for corresponding catalog number.
- Use high flow tubes on page HC5.