



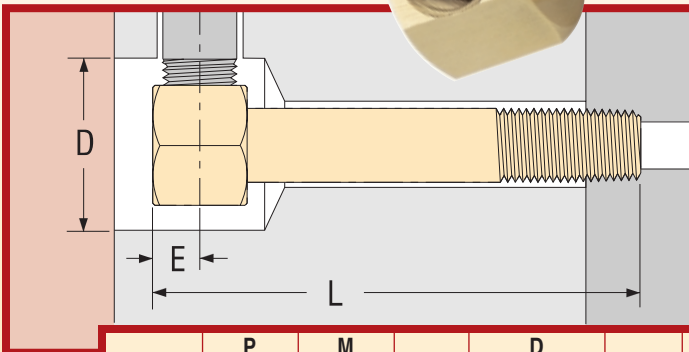

Brass Extension Elbows


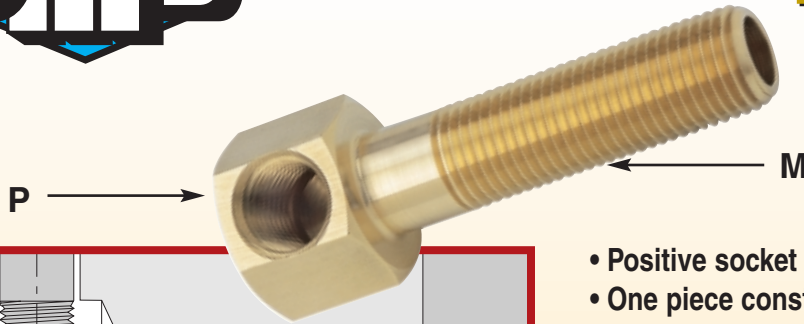


- Positive socket wrench installation.
- One piece construction ensures positive alignment, and complete removal.
- Easy length adjustment (see Brass Extension Plugs).
- Custom elbows are available in exact lengths and a wide variety of thread combinations. (Including BSP)

ELBOW NUMBER	P TAP SIZE FEMALE (NPT)	M PIPE SIZE MALE (NPT)	HEX SIZE	D WRENCH CLEARANCE DIAMETER	E	OVERALL LENGTH "L"							
						2-1/2"	4"	5-1/2"	7"	8-1/2"	10"	11-1/2"	13"
18B	1/8	1/8	3/4	1-1/4	9/32	X025	X040	X055	X070	X085	X100	X115	X130
1814B	1/8	1/4	3/4	1-1/4	9/32	X025	X040	X055	X070	X085	X100	X115	X130
14B	1/4	1/4	7/8	1-3/8	11/32	X025	X040	X055	X070	X085	X100	X115	X130
1438B	1/4	3/8	7/8	1-3/8	11/32	X025	X040	X055	X070	X085	X100	X115	X130
38B	3/8	3/8	1"	1-1/2	1/2	X025	X040	X055	X070	X085	X100	X115	X130
50B	1/2	1/2	1-1/4	1-3/4	5/8	X025	X040	X055	X070	X085	X100	X115	X130

To order, add overall length to catalog number. Example: 18BX025

Hex Elbows

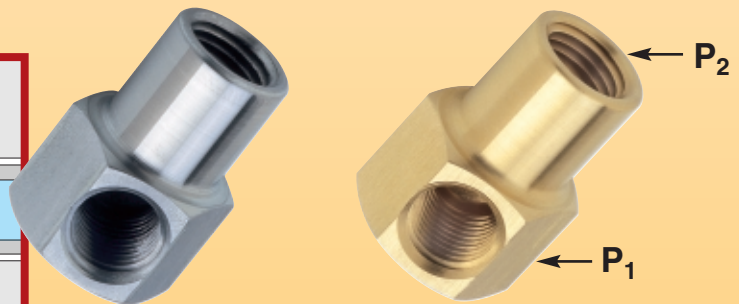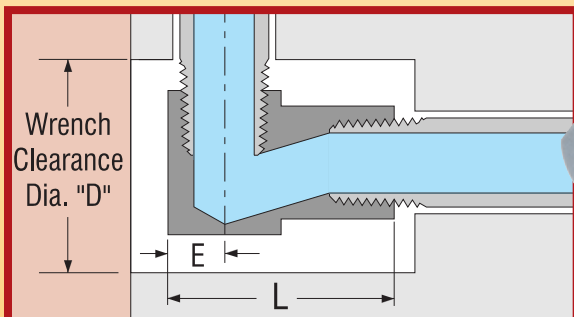

- Available in brass or zinc plated steel.
- Easy socket wrench installation and removal.

ELBOW NUMBER	P ₁ TAP SIZE FEMALE (NPT)	P ₂ TAP SIZE FEMALE (NPT)	L	E	D WRENCH CLEARANCE DIAMETER	HEX SIZE	CATALOG NUMBER	
							STEEL	BRASS
16S	1/16	1/16	13/16	7/32	1"	9/16	16S-S	16S-B
18S	1/8	1/8	1"	9/32	1-1/4	3/4	18S-S	18S-B
1814S	1/8	1/4	1-1/4	9/32	1-1/4	3/4	1814S-S	1814S-B
14S	1/4	1/4	1-3/8	11/32	1-3/8	7/8	14S-S	14S-B
1438S	1/4	3/8	1-3/8	11/32	1-3/8	7/8	1438S-S	1438S-B
38S	3/8	3/8	1-5/8	1/2	1-1/2	1"	38S-S	38S-B
50S	1/2	1/2	1-7/8	9/16	1-7/8	1-1/4	50S-S	50S-B
75S	3/4	3/4	2-1/4	5/8	2-1/4	1-1/2	75S-S	75S-B

- Angular flow path allows connecting fittings to be torqued tight without choking off flow.
- Requires much smaller clearance diameter than standard pipe elbows.