



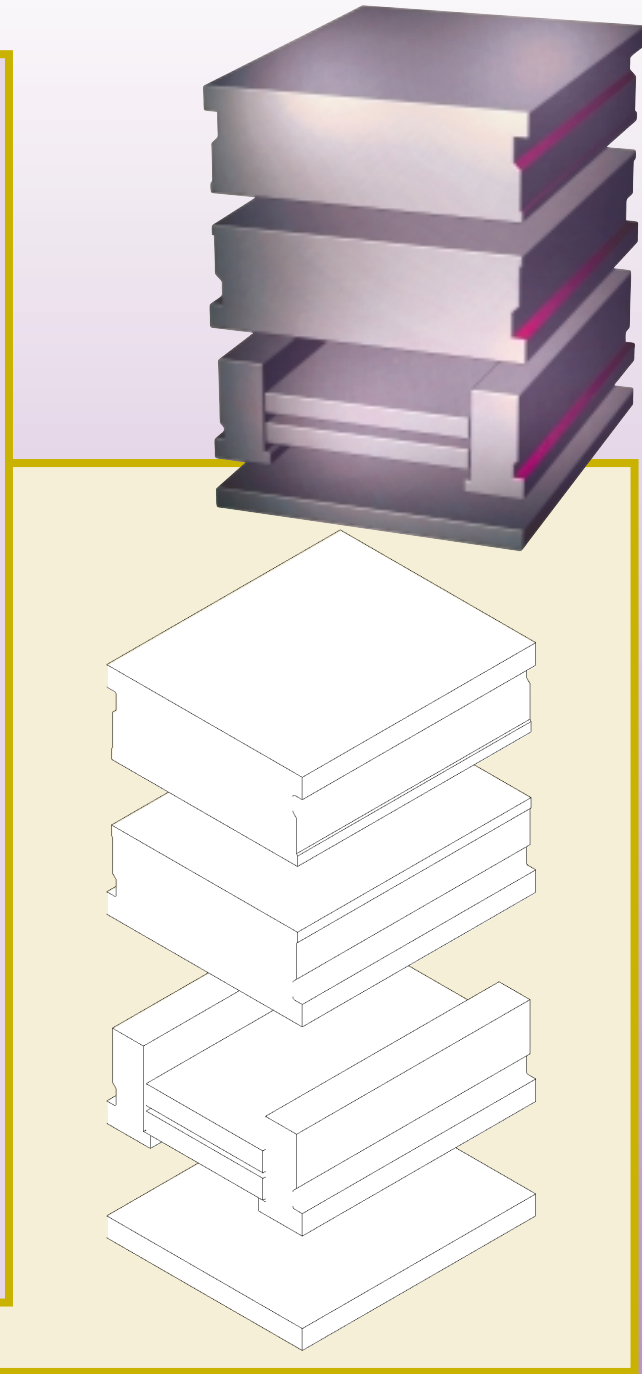

QUICKSET ALUMINUM MOLD MATERIAL 196 SERIES

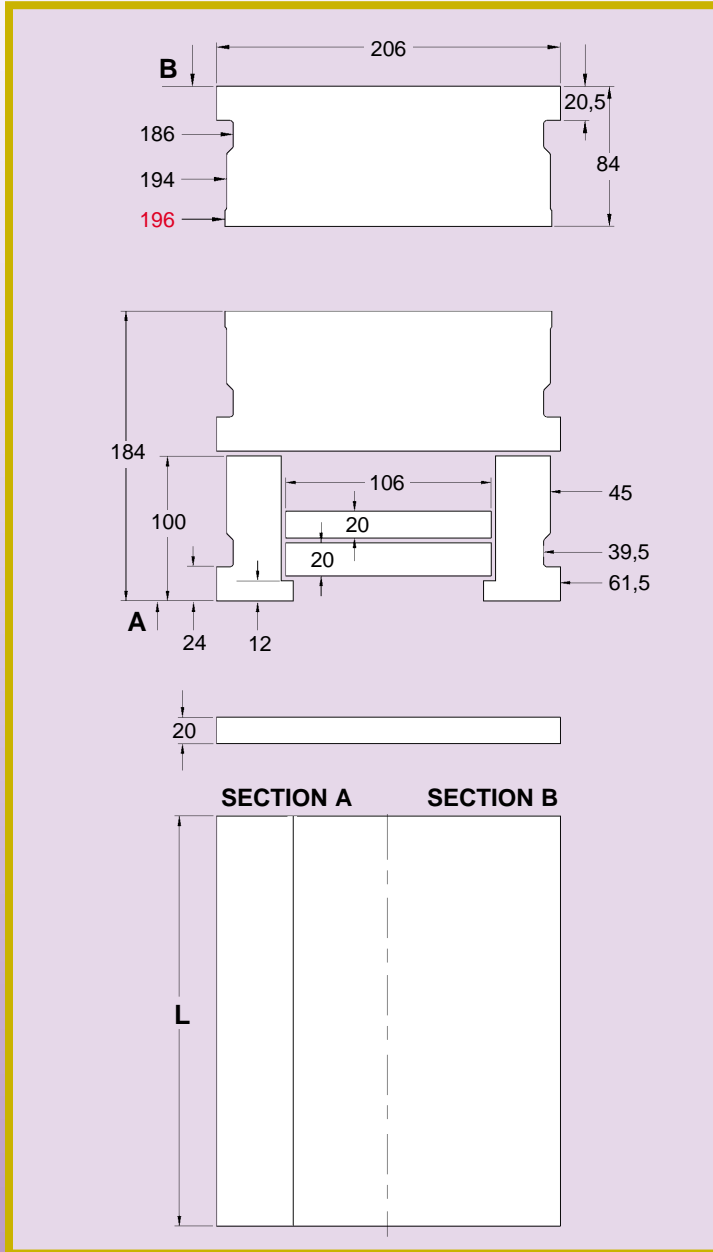

CATALOG NUMBER	L	APPROX. NET WEIGHT	
		kg	lb.
M1961	200	40	88
M1962	300	55	121
M1963	400	70	154
M1964	500	85	187
M1965	600	100	220

- Quickset AMMO is supplied in an extruded material only format. All final machining is required.
- Quickset AMMO material is available in special lengths up to one meter. Call for quotation.
- CAD files are available from the Almo web site or on CD from DMS.

MATERIAL: HD .87- 7022 T651
TENSIAL STRENGTH: 490-530 N/sq mm
HARDNESS: 150 HB

- The heat transfer characteristics of aluminum promotes faster cycle times.
- Quickset AMMO can be ground, welded and textured.
- When reaming holes, especially small diameters in aluminum, it is advised to be oversize by +.01 mm to +.02 mm.