



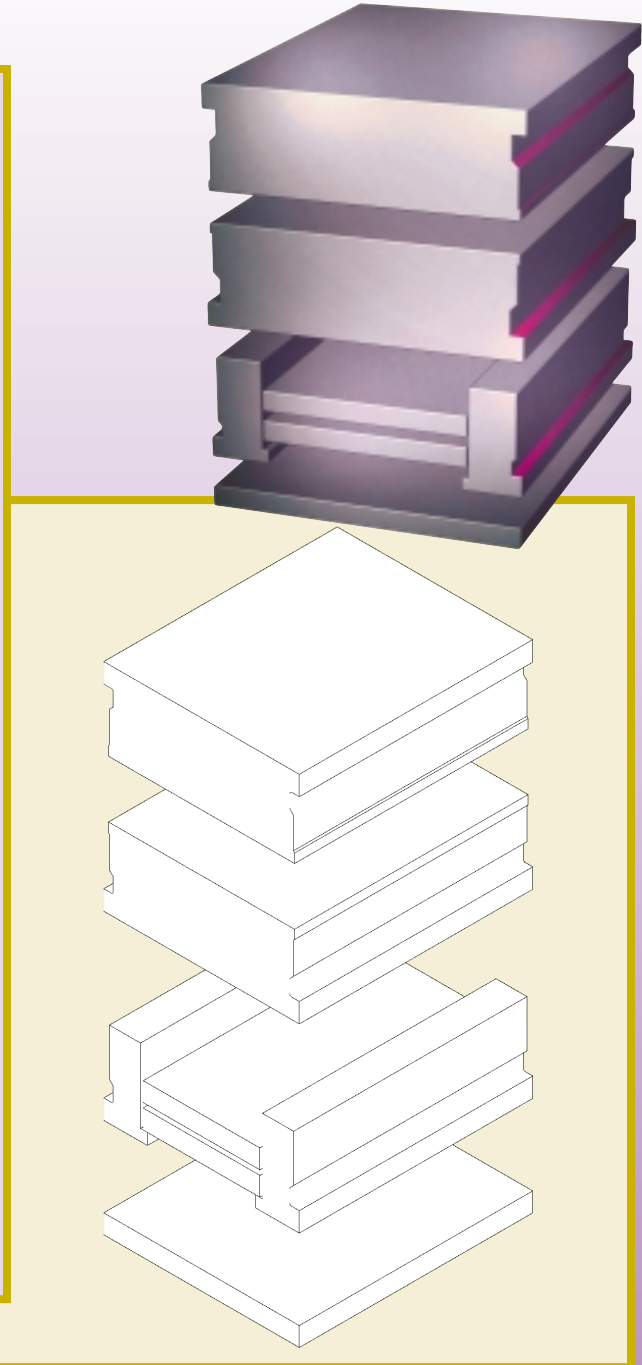

QUICKSET ALUMINUM MOLD MATERIAL 246 SERIES

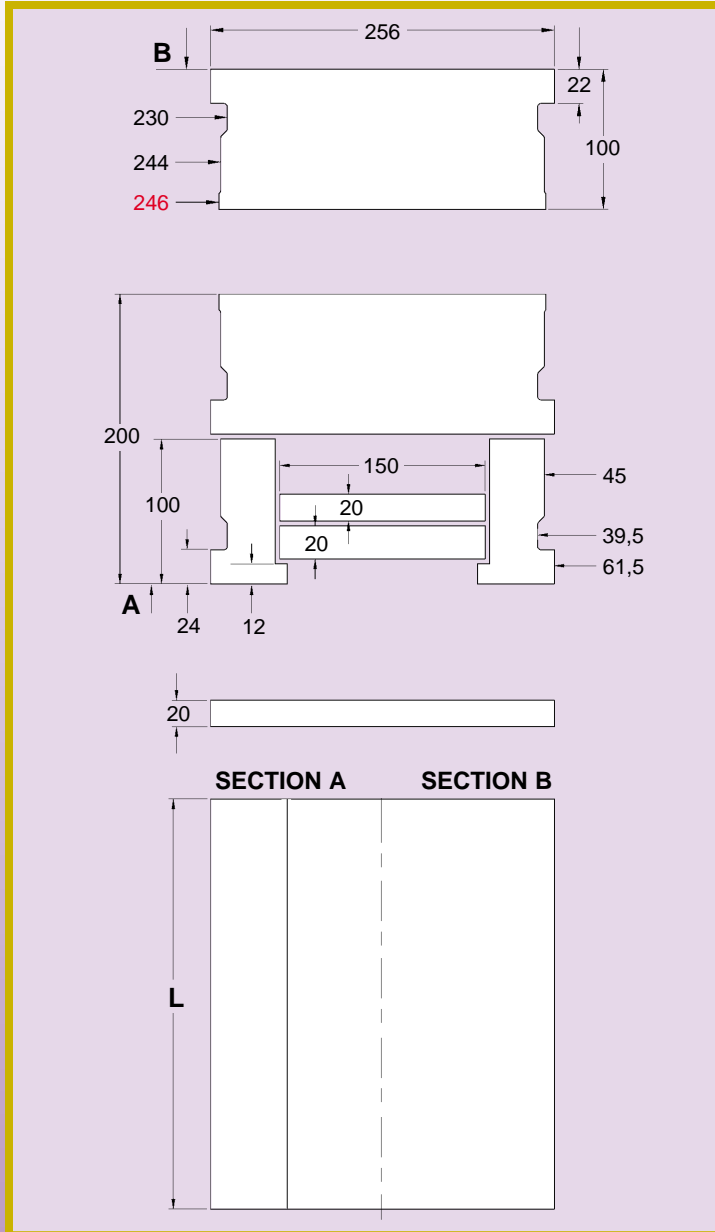

CATALOG NUMBER	L	APPROX. NET WEIGHT	
		kg	lb.
M2461	250	64	141
M2462	350	83	183
M2463	450	103	227
M2464	550	122	269
M2465	650	141	311

- Quickset AMMO is supplied in an extruded material only format. All final machining is required.
- Quickset AMMO material is available in special lengths up to one meter. Call for quotation.
- CAD files are available from the Almo web site or on CD from DMS.

- Quickset AMMO material is 1/3 the density of steel.
- Freight and handling costs can be significantly reduced.
- Machining, EDM and polishing are considerably faster.
- Using electrodes with reduced current and spark gap will result in improved surface finishes.

When installing leader pins and bushings into the mold, it is advised that the press fit be lubricated. This will eliminate the potential bonding of the aluminum to the steel when pressure is applied.